

Table of Contents

Configuring the BIOS	1
Getting Into Your BIOS	1
BIOS Settings	2
Quiet Boot	2
Watch Dog Function	2
AES-NI Encryption	3
AHCI SATA Configuration	3
IPMI Configuration	3
Boot Order Configuration	3

Configuring the BIOS

We now need to configure the BIOS of the server motherboard.

You can do this via a keyboard and monitor attached to the server or through IPMI as outlined in a previous section.

The settings and screen shots are all taken from a Supermicro X10SRH-CLN4F, but most are applicable to most server motherboards (I would imagine).


Getting Into Your BIOS

In order to gain access to the motherboard's BIOS the user is required to press a certain key at a certain point in time (usually as the POST messages are displayed).

Consult your motherboard documentation to find out how to gain access to your motherboard's BIOS.

On Fester's motherboard it is done by pressing the "DEL" key at a specific point.

Incidentally, motherboards usually display a screen at some point during the POST process that tells you what key to press, something like this.

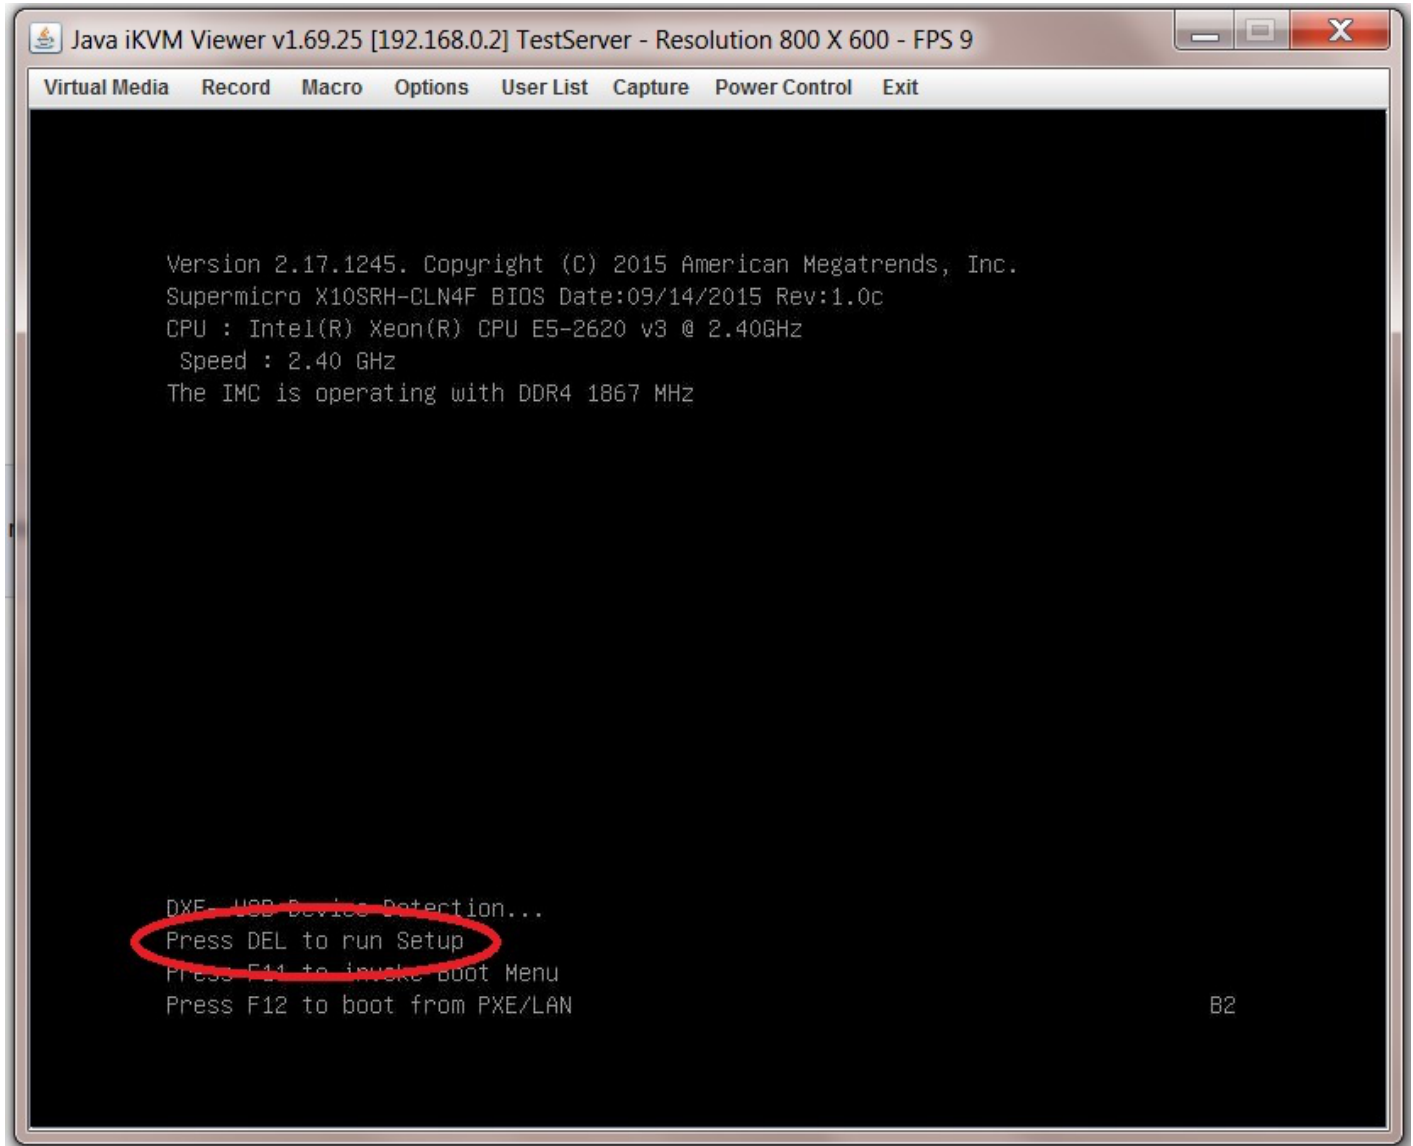

When you have access to the BIOS it's time to configure it.

Most BIOS settings are navigated using the "←→↑↓" keys.

BIOS Settings

Quiet Boot

Watch Dog Function

AES-NI Encryption

AHCI SATA Configuration

IPMI Configuration

Boot Order Configuration

From:

<https://familybrown.org/dokuwiki/> - danb35's Wiki

Permanent link:

https://familybrown.org/dokuwiki/doku.php?id=fester:prelim_bios&rev=1465579047

Last update: **2016/06/10 17:17**

